



DESCRIPTION

Current transformer to measure and/or protect high voltage up to 36 kV used for measurement instruments, meters, relays and other similar devices. Designed to be used indoors.

The active part is protected by brown insulation type E epoxy resin (in accordance with CEI 60085 standard).

It has great mechanical resistance and it is completely damp-, oil-, and dust-proof, and resists most chemical products.

It can be installed in any position.

MECHANICAL CHARACTERISTICS

- Tightening torque for the nuts and bolts:

M6 Terminals:	2.5 N.m	Earth terminal M8:	6 N.m
M12 Terminals:	20 N.m	Base fixings M10:	38 N.m
- Brass primary terminals and steel earth terminal.
- Sealable transparent polycarbonate secondary terminal cover.
- Iron base plate with passivated zinc coating, 5 mm thick.
- Approximate weight of device: 18 kg


CLASS AND BURDEN TABLE

		MAXIMUM RATED BURDEN (VA) *				
		Class	80 In	100 In	150 In	200 In
1 secondary	Measurement	0.2	20	15	10	5
		0.2S	20	15	10	5
		0.5	20	15	10	5
	Protection	0.5S	20	15	10	5
		1	25	20	15	10
		5P5	20	20	15	10
2 secondaries	Measurement and Protection	5P10	20	15	10	5
		5P20	15	10	5	-
		0.2	10	-	-	-
		5P10	20	-	-	-
		0.2	10	-	-	-
		5P20	15	-	-	-
		0.2S	10	-	-	-
		5P10	20	-	-	-
		0.2S	10	-	-	-
	5P20	15	-	-	-	
	0.5	20	15	-	-	
	5P10	15	10	-	-	
	0.5	20	15	-	-	
	5P20	10	5	-	-	
	0.5S	20	15	-	-	
	5P10	15	10	-	-	
	0.5S	20	15	-	-	
	5P20	10	5	-	-	
		Single primary ratio	Up to 1200 A		In < 600 A	In < 300 A
		Double primary ratio	Up to 2x600 A		In<2x300 A	In<2x150 A


* Orientative values.

Upon request, other classes and ratios different from those in the table can be budgeted.

CONNECTIONS

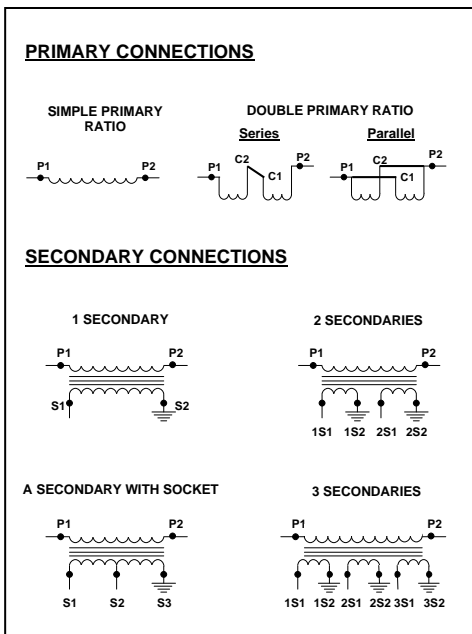

INSTALATION DISTANCE

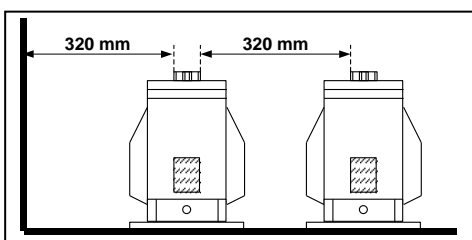

ELECTRICAL CHARACTERISTICS

		IEC 61869-1 and -2
Highest voltage for the material (U_m) (kV)		36
Maximum service voltage (kV)		36
Power frequency withstand voltage (kV)	Primary	70
	Secondary	3
Lightning impulse withstand voltage (peak value)		170
Primary assigned intensity (A)	Single ratio (I_{pn})	< 600
	Double ratio (I_{pn})	< 300 - 600
Secondary assigned intensity (I_{sn}) (A)		1 ó 5
Assigned frequency (f) (Hz)		50/60
Number of secondary winding		1 ó 2
Short-circuit thermal current (I_{th}) (kA)		≤ 40
Assigned dynamic current (I_{dyn})		2.5 I_{th}

DIMENSIONS (mm)

